



EMERGENCY LIGHTING



PUBLIC SAFETY • MANY WIN • CROWD SAFETY



EMERGENCY LIGHTING



 **Guangdong Zhong`An Lighting Co., Ltd**

Telephone: +8618802554481
17 Rainbow Road, Building 2, 2nd Floor, Jianghai District, Jiangmen City, Guangdong Province
S/R: 405+1, 4/F, Building 4, Qiu Square, Guzhen, Zhongshan, Guangdong

Guangdong Zhong'an Lighting Co., Ltd.

Telephone: 18802554481
17 Rainbow Road, Building 2, 2nd
Floor, Jianghai District, Jiangmen
City, Guangdong Province

S/R: 405+1, 4/F, Building 4,
Qiu Square, Guzhen,
Zhongshan, Guangdong






PUBLIC SAFETY • MANY WIN • CROWD SAFETY



ENTERPRISE
LOOK TO THE FUTURE




COMPANY
ENVIRONMENT

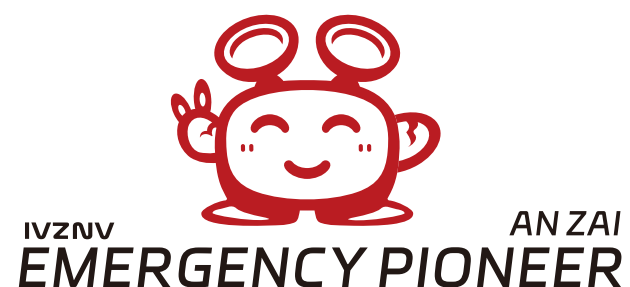




Directory

1.1	Emergency dual-head lamp	01-05
1.2	Minimalist Dual-Head Lamp	06-07
1.3	Single-head lighting lamp	08
1.4	With driven lighting lamp	09
1.5	2-in-1 Indicator Double-Head Lamp	10
1.6	Wall-mounted hoisting indicator light	11-12
1.6	Hanging sign light	13-17
1.6	Wall-mounted indicator light	18
1.6	Explosion-proof emergency light	19
1.6	Emergency lighting	20-21
1.6	Power module	22-24





Dimension
unit:cm

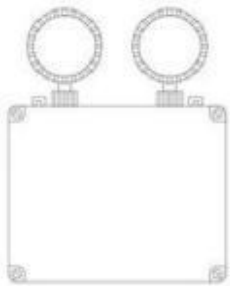

31.5
25.5 — 6.5

ZA-099	ABS+PC	Surface	85-265VAC 50-60Hz	2*5W	6V Lead-acid /Ni-cd	max. 24h	≥3 hrs	IP65
	ABS+PC	Surface	85-265VAC 50-60Hz	2*10W	11.1V Lithium	max. 24h	2 hrs	IP65



Dimension
unit:cm



21.5
19

ZA-1066	ABS+PC	Surface	85-265VAC 50-60Hz	2*3W	3. 7V Lithium	max. 24h	≥3 hrs	IP30
---------	--------	---------	----------------------	------	---------------	----------	--------	------



Dimension
unit:cm



27.5
28 — 7.5

ZA-1088	ABS+PC	Surface	85-265VAC 50-60Hz	2*3W	3. 7V Lithium	max. 24h	≥3 hrs	IP30
---------	--------	---------	----------------------	------	---------------	----------	--------	------



Dimension
unit:cm




25.5
25.5 4.5

ZA-1068	ABS+PC	Surface	85-265VAC 50-60Hz	2*3W	3. 7V Lithium	max. 24h	≥3 hrs	IP30
---------	--------	---------	----------------------	------	---------------	----------	--------	------






Dimension
unit:cm

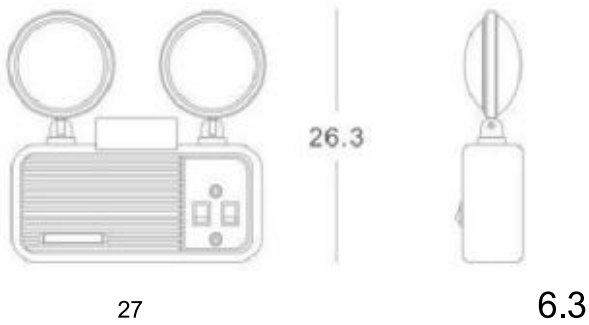

ZA-1098	ABS+PC	Surface	85-265VAC 50-60Hz	2*3W	3.7V Lithium	max. 24h	≥3 hrs	IP30
---------	--------	---------	----------------------	------	--------------	----------	--------	------




Dimension
unit:cm

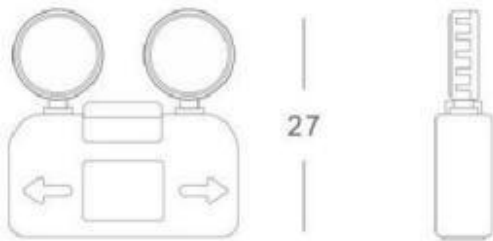

ZA-1002	ABS+PC	Surface	85-265VAC 50-60Hz	2*5W	3.7V Lithium	max. 24h	≥3 hrs	IP30
---------	--------	---------	----------------------	------	--------------	----------	--------	------




Dimension
unit:cm

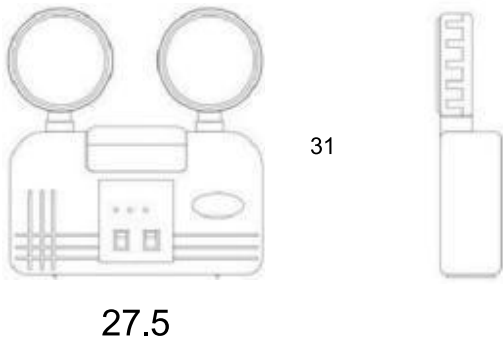

ZA-129	ABS+PC	Surface	85-265VAC 50-60Hz	2*3W	3.7V Lithium	max. 24h	≥3 hrs	IP30
--------	--------	---------	----------------------	------	--------------	----------	--------	------



Dimension
unit:cm

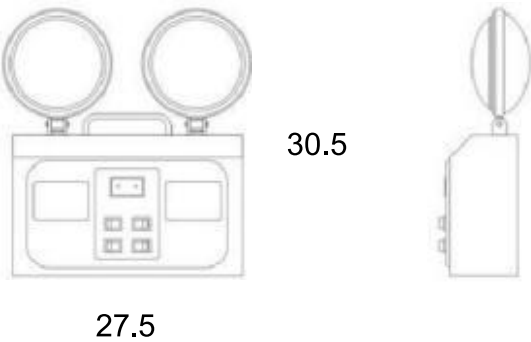


ZA-1038B	Metal+PC	Surface	85-265VAC 50-60Hz	2*3W	3.7V Lithium	max. 24h	≥3 hrs	IP30
----------	----------	---------	----------------------	------	--------------	----------	--------	------






Dimension
unit:cm

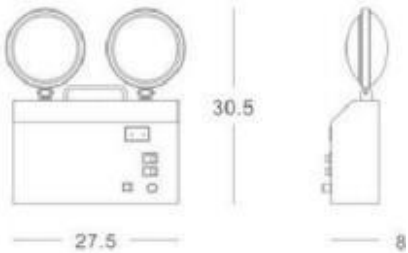

Model	Material	Mounting	Input voltage	Power	Battery	Charging time	Emergency time	
ZA-1038A	Metal+PC	Surface	85-265VAC 50-60Hz	2*3W	3.7V Lithium	max.24h	≥3 hrs	IP30




Dimension
unit:cm

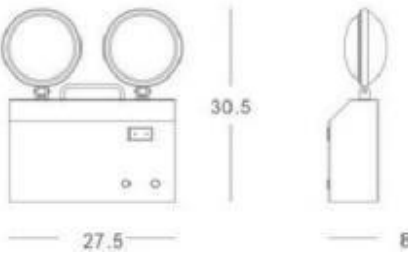

ZA-1038C	Metal+PC	Surface	85-265VAC 50-60Hz	2*3W	3. 7V Lithium	max. 24h	≥3 hrs	IP30
----------	----------	---------	----------------------	------	---------------	----------	--------	------



Dimension
unit:cm

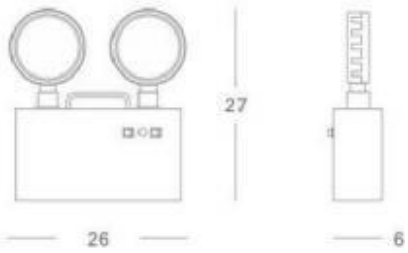

ZA-1018	Metal+PC	Surface	85-265VAC 50-60Hz	2*3W	3. 7V Lithium	max. 24h	≥3 hrs	IP30
---------	----------	---------	----------------------	------	---------------	----------	--------	------




Dimension
unit:cm



ZA-206	ABS+PC	Surface	85-265VAC 50-60Hz	2*3W	3. 7V Lithium	max. 24h	≥3 hrs	IP30
--------	--------	---------	----------------------	------	---------------	----------	--------	------

Dimension
unit:cm



ZA-208	ABS+PC	Surface	85-265VAC 50-60Hz	2*3W	3. 7V Lithiumi	max. 24h	≥3 hrs	IP30
--------	--------	---------	----------------------	------	----------------	----------	--------	------

EMERGENCY TWINSPOOT



Dimenstion
unit:cm



Model	Material	Mounting	Input voltage	Power	Battery	Charging time	Emergency time	IP rating
ZA-018	ABS+PC	Surface	85-265VAC 50-60Hz	2*3W	3.7V Lithium	max. 24h	≥3 hrs	IP30




Dimenstion
unit:cm



Model	Material	Mounting	Input voltage	Power	Battery	Charging time	Emergency time	IP rating
ZA-029	ABS+PC	Surface	85-265VAC 50-60Hz	2*3W	3.7V Lithium	max. 24h	≥3 hrs	IP30



Dimenstion
unit:cm

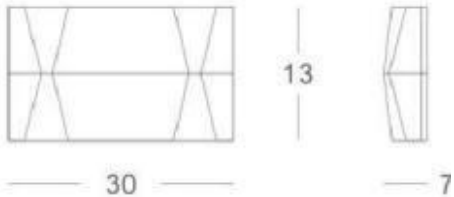


Model	Material	Mounting	Input voltage	Power	Battery	Charging time	Emergency time	IP rating
ZA-028	ABS+PC	Surface	85-265VAC 50-60Hz	2*3W	3.7V Lithium	max. 24h	≥3 hrs	IP30



EMERGENCY CEILING LIGHT




Dimenstion
unit:cm

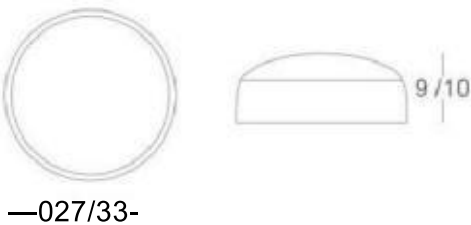

Model	Material	Mounting	Power	Input voltage	Battery	Emergency time	IP rating
ZA-301	PC	Surface	18W	AC85-265V 50/60Hz	3.7V/1800mAh Lithium	≥2 hrs	IP65




Dimenstion
unit:cm

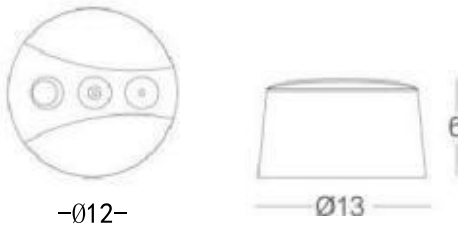

Model	Material	Mounting	Power	Input voltage	Battery	Emergency time	IP rating
ZA-321	PC	Surface	2W	AC220-240V 50/60Hz	3.6V1800mAh Ni-cd	≥2 hrs	IP30



Dimenstion
unit:cm

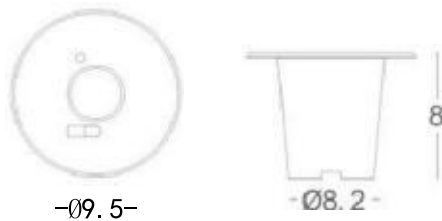


Model	Material	Mounting	Power	Input voltage	Battery	Emergency time	IP rating
ZA-411	PC	Recessed	2W	AC220-240V 50/60Hz	2.4V/1800mAh Ni-cd	≥2 hrs	IP30






Dimension
unit:cm

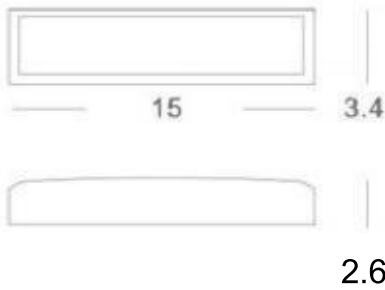

Model	Material	Mounting	Power	Input voltage	Battery	Emergency time
ZA-331	Metal	Recessed	3W	AC85-265V 50/60Hz	3.7V/1800mAh Lithium	≥3 hrs




Dimension
unit:cm

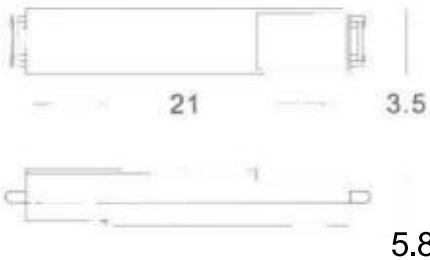

Model	Material	Mounting	Power	Input voltage	Battery	Emergency time
ZA-330	PC	Recessed	5W	AC220-240V 50/60Hz	6V/2000mAh Lead-acid	≥3 hrs



Dimension
unit:cm

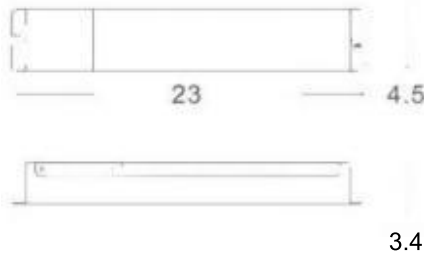

Model	Material	Mounting	Power	Input voltage	Battery	Emergency time
ZA-332	Metal	Recessed	3W	AC220-240V 50/60Hz	3.6V/1500mAh Ni-cd	≥2 hrs




Dimension
unit:cm



Model	Material	Mounting	Input voltage	Power	Battery	Charging time	Emergency time	IP rating
ZA-017	ABS+PC	Surface	85-277VAC 50-60Hz	2*3W+3W	3.7V Lithium	max. 24h	≥3 hrs	IP30



Dimension
unit:cm

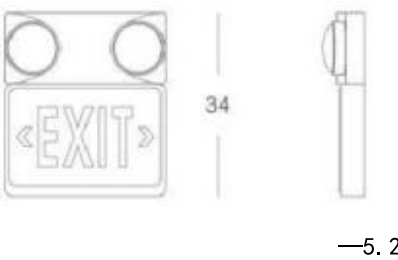

Model	Material	Mounting	Input voltage	Power	Battery	Charging time	Emergency time	IP rating
ZA-017A	ABS+PC	Surface	85-277VAC 50-60Hz	2*3W+3W	3.7V Lithium	max. 24h	≥3 hrs	IP30



Dimension
unit:cm



Model	Material	Mounting	Input voltage	Power	Battery	Charging time	Emergency time	IP rating
ZA-017B	ABS+PC	Surface	85-277VAC 50-60Hz	2*3W+3W	3.7V Lithium	max. 24h	≥3 hrs	IP30





Dimension
unit:cm



20.2

5.2

ZA-027	PC	Surface	85-265VAC 50-60Hz	3W	3.7V Lithium	max. 24h	≥3 hrs	IP30
--------	----	---------	----------------------	----	--------------	----------	--------	------



Dimension
unit:cm




20.2

—5.2

ZA-027A	PC	Surface	85-265VAC 50-60Hz	3W	3.7V Lithium	max. 24h	≥3 hrs	IP30
---------	----	---------	----------------------	----	--------------	----------	--------	------



Dimension
unit:cm




30.5

—5.2

ZA-027B	PC	Surface	85-265VAC 50-60Hz	3W	3.7V Lithium	max. 24h	≥3 hrs	IP30
---------	----	---------	----------------------	----	--------------	----------	--------	------



Dimension
unit:cm



14.5

4.5

Surface mount

Embedded installation



ZA-090	PC	Surface	85-265VAC 50-60Hz	3W	3.7V Lithium	max. 24h	≥3 hrs	IP65
--------	----	---------	----------------------	----	--------------	----------	--------	------



Dimension
unit:cm



16


36

ZA-065	PC	Surface	85-265VAC 50-60Hz	3W	3.7V Lithium	max. 24h	≥3 hrs	IP30
--------	----	---------	----------------------	----	--------------	----------	--------	------






Dimension
unit:cm

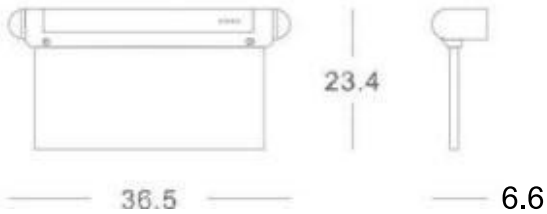

ZA-066	PC	Surface	85-265VAC 50-60Hz	3W	3.7V Lithium	max. 24h	≥3 hrs	IP30
--------	----	---------	----------------------	----	--------------	----------	--------	------




Dimension
unit:cm

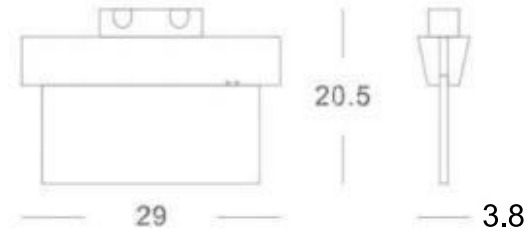

ZA-091	PC	Surface	85-265VAC 50-60Hz	3W	3.7V Lithium	max. 24h	≥3 hrs	IP30
--------	----	---------	----------------------	----	--------------	----------	--------	------



Dimension
unit:cm

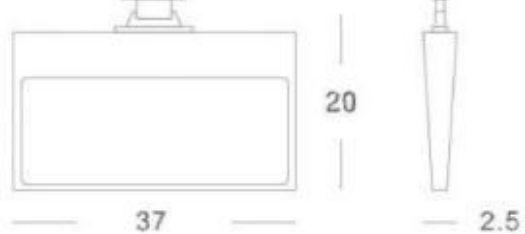

ZA-060	PC	Surface	85-265VAC 50-60Hz	3W	3.7V Lithium	max. 24h	≥3 hrs	IP30
--------	----	---------	----------------------	----	--------------	----------	--------	------




Dimension
unit:cm



ZA-063	Aluminum+ Acrylic	Pendant	85-265VAC 50-60Hz	3W	1.2V Ni-cd	max. 24h	≥3 hrs	IP30
--------	----------------------	---------	----------------------	----	------------	----------	--------	------

Dimension
unit:cm

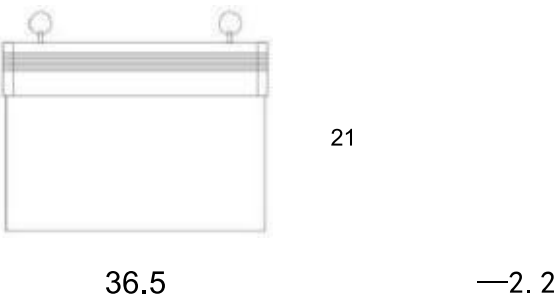

ZA-064	Aluminum+Pendant Acrylic		85-265VAC 50-60Hz	3W	1.2V Ni-cd	max. 24h	≥3 hrs	IP30
--------	-----------------------------	--	----------------------	----	------------	----------	--------	------



EMERGENCY EXIT SIGN




Dimenstion
unit:cm



ZA-068	Aluminum+ Acrylic	Surface	85-265VAC 50-60Hz	3W	3.7V Lithium	max. 24h	≥3 hrs	IP30
--------	----------------------	---------	----------------------	----	--------------	----------	--------	------

Dimenstion
unit:cm

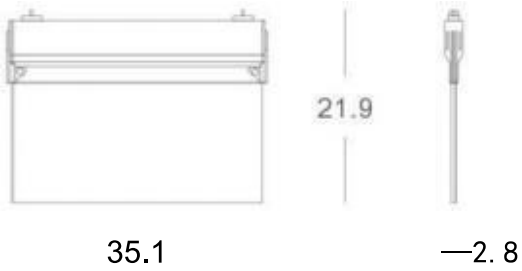


ZA-095	Aluminum+ Acrylic	Pendant	85-265VAC 50-60Hz	3W	3.7V Lithium	max. 24h	≥2 hrs	IP30
--------	----------------------	---------	----------------------	----	--------------	----------	--------	------



EMERGENCY EXIT SIGN




Dimenstion
unit:cm

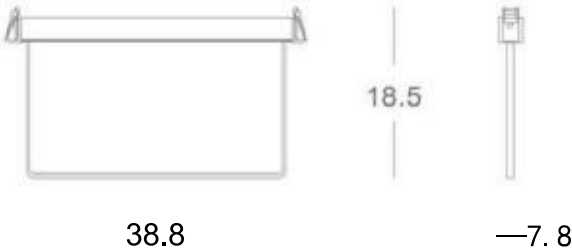

ZA-088	Aluminum +Acrylic	Recessed	85-265VAC 50-60Hz	3W	3.6V Ni-cd	max. 24h	≥3 hrs	IP30
--------	----------------------	----------	----------------------	----	------------	----------	--------	------

Dimenstion
unit:cm

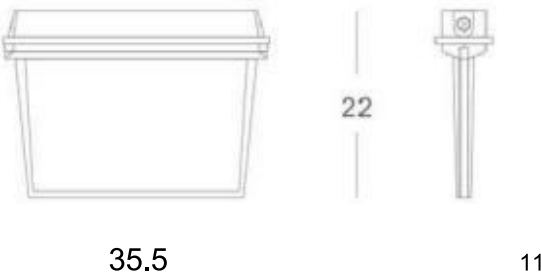


ZA-092	PC	Surface	85-265VAC 50-60Hz	3.5W	3.7V Lithium	max. 24h	≥3 hrs	IP65
--------	----	---------	----------------------	------	--------------	----------	--------	------



EMERGENCY EXIT SIGN



Dimenstion
unit:cm

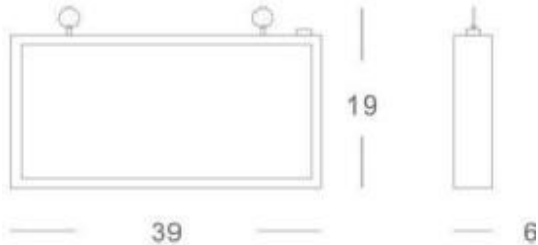

ZA-069	PC	Surface	85-265VAC 50-60Hz	3W	3.7V Lithium	max. 24h	≥3 hrs	IP30
--------	----	---------	----------------------	----	--------------	----------	--------	------

Dimenstion
unit:cm



ZA-062	PC	Surface	175-245VVAC 50-60Hz	3W	1.2V Ni-cd	max. 24h	≥2 hrs	IP30
--------	----	---------	------------------------	----	------------	----------	--------	------



EMERGENCY BULKHEAD




Dimenstion
unit:cm



ZA-035	PC	Surface	85-265VAC 50-60Hz	3W15W	3.7V Lithium	max. 24h	≥2 hrs	IP65
--------	----	---------	----------------------	-------	--------------	----------	--------	------



Dimenstion
unit:cm

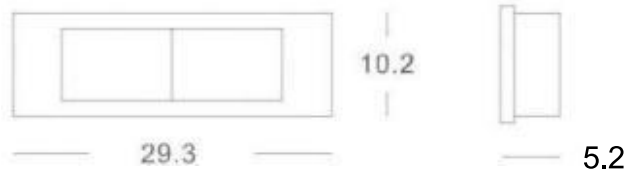

ZA-101	PC	Surface	85-265VAC 50-60Hz	3W15W	6V Lead-acid	max. 24h	≥3 hrs	IP30
--------	----	---------	----------------------	-------	--------------	----------	--------	------



Dimenstion
unit:cm




ZA-103	PC	Surface	85-265VAC 50-60Hz	3W15W	3.7V Lithium	max. 24h	≥3 hrs	IP30
--------	----	---------	----------------------	-------	--------------	----------	--------	------






Dimenstion
unit:cm

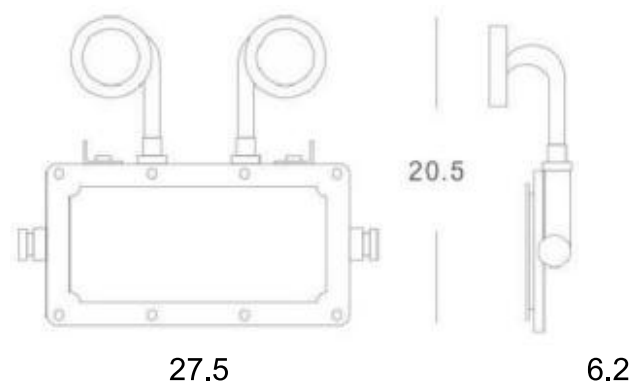

ZA-301	Die-casting aluminum	Surface	85-265VAC 50-60Hz	2*3W 3.7V Lithium	max. 24h	≥2 hrs	IP65
--------	----------------------	---------	----------------------	-------------------	----------	--------	------




Dimenstion
unit:cm

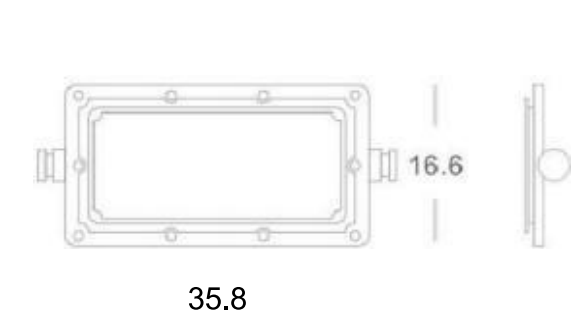

ZA-303	Die-casting aluminum	Surface	85-265VAC 50-60Hz	3W 3.7V Lithium	max. 24h	≥2 hrs	IP65
--------	----------------------	---------	----------------------	-----------------	----------	--------	------




Dimenstion
unit:cm

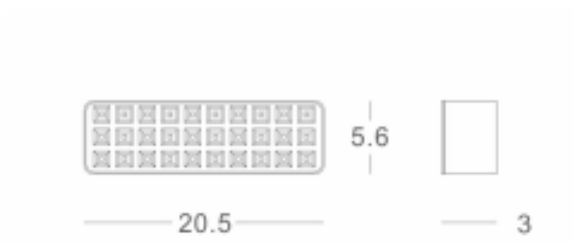

ZA-305	5W	AC220-240V 50/60Hz	Lithium	30 PCS	≥5 hrs
--------	----	--------------------	---------	--------	--------



Dimenstion
unit:cm

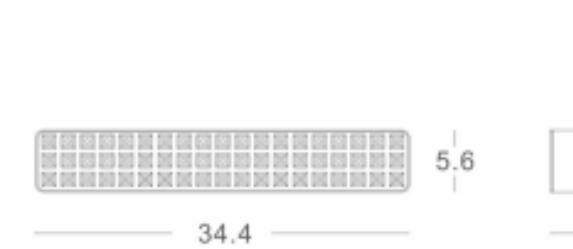

ZA-306	8W	AC220-240V 50/60Hz	Lithium	60 PCS	≥5 hrs
--------	----	--------------------	---------	--------	--------





Dimenstion
unit:cm


38

-4

ZA-306B	8W	AC220-240V 50/60Hz	Lithium	60 PCS	≥3 hrs
---------	----	--------------------	---------	--------	--------



Dimenstion
unit:cm



8.2

29.4-

2.9

ZA-307	10W	AC220-240V 50/60Hz	Lithium	80 PCS	≥3 hrs
--------	-----	--------------------	---------	--------	--------



Dimenstion
unit:cm



7.5




2.5

ZA-322	85-265VAC 50-60Hz	27-85V 3-24W	Lithium 3.7V	2 hrs
--------	-------------------	--------------	--------------	-------



Dimenstion
unit:cm

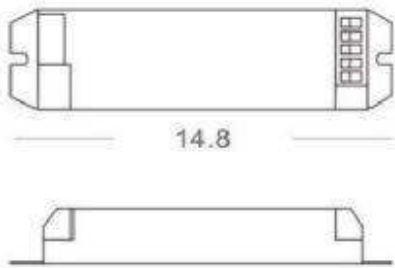

4

14.8


2.8

ZA-323	85-265VAC 50-60Hz	12-48V 20W	Lithium 11.1V	2 hrs
--------	-------------------	------------	---------------	-------






Dimension
unit:cm

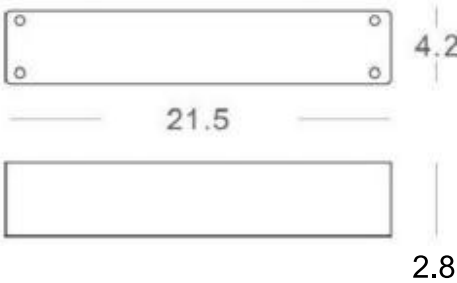

Model	Input voltage	Output voltage /power (emergency mode)	Battery pack	Emergency time
ZA-325	85-265VAC 50-60Hz	15-175V 3-18W	Lithium 7.4V	2 hrs


Dimension
unit:cm

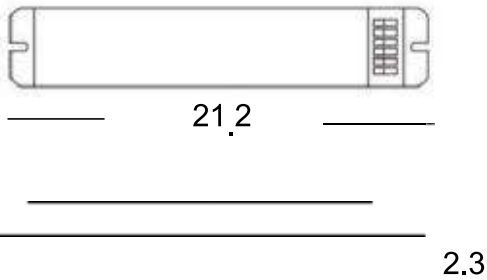

Model	Input voltage	Output voltage /power (emergency mode)	Battery pack	Emergency time
ZA-326	85-265VAC 50-60Hz	30W	Lithium 7.4V	2 hrs




Dimension
unit:cm

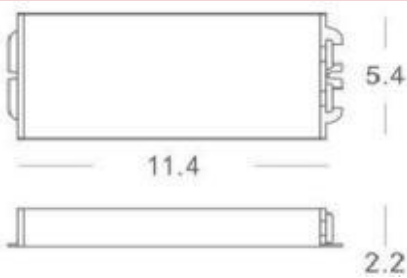

Model	Input voltage	Output voltage /power (emergency mode)	Battery pack	Emergency time
ZA-327	85-265VAC 50-60Hz	3-30W	Lithium 3.7V	2 hrs




Dimension
unit:cm

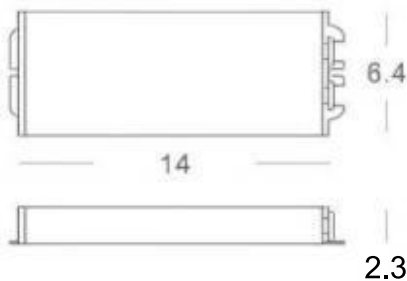

Model	Input voltage	Output voltage /power (emergency mode)	Battery pack	Emergency time
ZA-328	85-265VAC 50-60Hz	10-138V 1-15W	Lithium 7.4V	2 hrs



Dimension
unit:cm

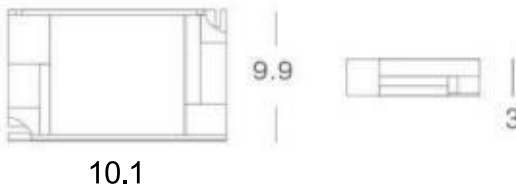

Model	Input voltage	Output voltage /power (emergency mode)	Battery pack	Emergency time
ZA-329	85-265VAC 50-60Hz	15-175V 5-100W	Lithium 7.4V	2 hrs





ZONA
INTELLIGENT
EVACUATION SYSTEM



For more intelligent emergency evacuation
lighting, contact WeChat to learn more!



initiative to understand customers' needs, predicted the market changes, and puts forward an innovative solution; Use of the creative thinking and advanced technology, innovation, and improve service levels

Guangdong ZhongAn Lighting Co., Ltd. is located in Jiangmen, is a professional production of fire emergency sign lamps, fire emergency lighting fixtures, integrated emergency lamps, all kinds of emergency power supplies, LED fire emergency ceiling lamps, emergency power supplies, human body induction lamp strength manufacturers, with products including fire emergency lighting, emergency power supply, human body induction lamp, LED human body induction garage lamp, human body sensor and sound and light control, etc. The company's products have passed the National Ministry of Public Security fire product type approval, national compulsory certification 3C certification, CE certification, strict implementation of GB17945-2010, GB7000-12002 national standards research and development, production. The company has a strong team of senior electronic engineers, business management, marketing planning, etc.!

Companies adhering to the "people-oriented, quality to prosper enterprises, scientific and technological innovation, integrity and pragmatic" business philosophy, is committed to providing professional, humanized, personalized lighting services. Guangdong ZhongAn Lighting Co., Ltd. welcomes friends from all walks of life to visit, guide and negotiate business.



Wang Fu Bing



Professional: Focus on the fire lighting industry for more than ten years, for more than ten years we have only done one thing

Innovation: Independent research and development and design innovation to keep new, master the core technology

Leading: independent research and development strength, excellent design ability, high standards of quality and cost control system